




Linton and Hirst Group

COMMITTED TO QUALITY

Nickel alloy laminations

EK stacks

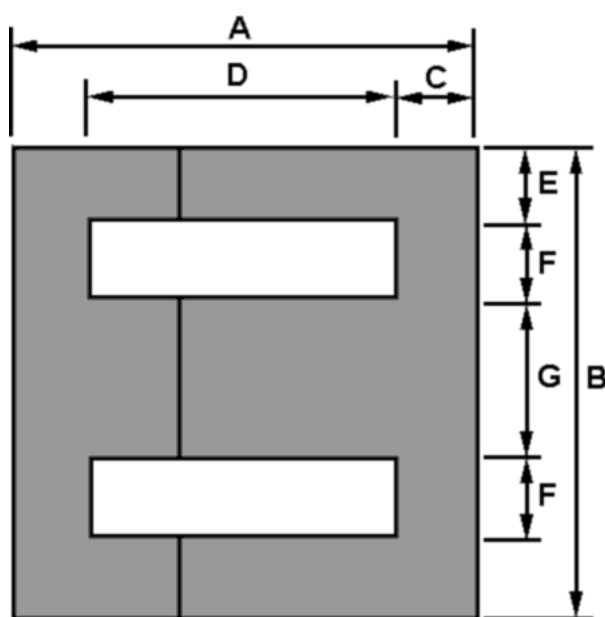

Part No.	A _L	A	B	C	D	E	F	G	Core Area	Path length	Window area	Weight sq. stk.	Gauge Avail
-	(2)	mm	mm	mm	mm	mm	mm	mm	cm ²	cm	cm ²	Kg	mm
EK20	400	20.0	20.0	3.0	14.0	3.0	4.0	6.0	0.360	4.80	0.560	0.015	0.2
"	500	"	"	"	"	"	"	"	"	"	"	"	"
"	630	"	"	"	"	"	"	"	"	"	"	"	"
EK25	200	25.0	25.0	3.8	17.4	3.8	4.9	7.6	0.578	5.98	0.853	0.030	0.2
"	400	"	"	"	"	"	"	"	"	"	"	"	"
"	500	"	"	"	"	"	"	"	"	"	"	"	"
"	630	"	"	"	"	"	"	"	"	"	"	"	"
"	800	"	"	"	"	"	"	"	"	"	"	"	"
EK32	630	32.0	32.0	4.8	22.4	4.8	6.4	9.6	0.922	7.63	1.44	0.062	0.2
"	1000	"	"	"	"	"	"	"	"	"	"	"	"

- (1) For 'A' grade; 'B' grade = 0.94 x 'A' weight
 (2) For 'B' grade 0.2mm thick

[Back to Nickel laminations](#)

Parsonage Road, Stratton St. Margaret, Swindon, Wiltshire SN3 4RN UK

Tel: +44 (0)1793 825000

Fax: +44 (0)1793 827802

email: sales@linton-hirst.co.uk

a subsidiary of [TT Electronics plc](#)

This page was last updated

We would welcome comments about this site, please use the form on the [feedback](#) page

© 2001 Linton and Hirst